REVISION	DATE	REV.
NEW	2008/02/01	A/0

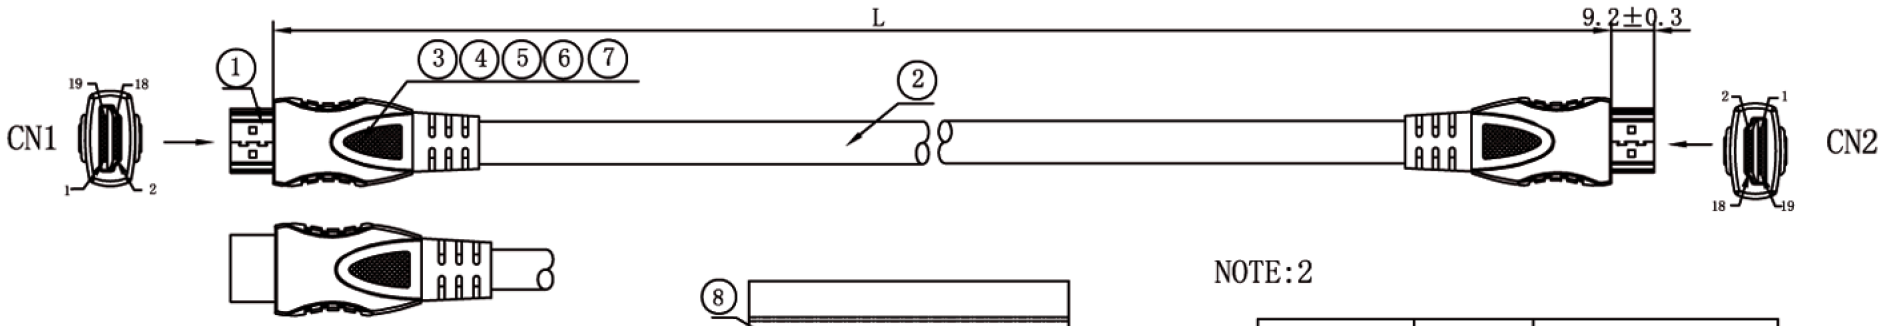

MOLD NO :HY028

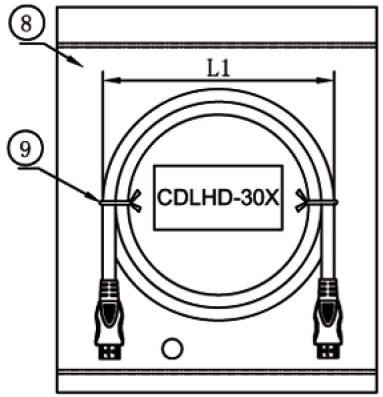

PACKING DRAW:

NOTE:2

L(MM)	L1	POLYBAG
1000±20	120±10	160*200*0.08
2000±30	130±10	180*230*0.08
3000±50	130±10	180*230*0.08
5000±100	150±10	180*230*0.08
75000±200	150±10	200*240*0.08
10000±300	160±15	220*260*0.08

NOTE:
1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 300V 5Mohm;
   (3). Contactor resistance:2ohm Max;
   (4). Dielectric strength:100V AC/Minute,1mA.
2. ROSH compliant
3. PRINT WORD:E258105 AWM STYLE 20276 80℃ 30V VW-1 HDMI

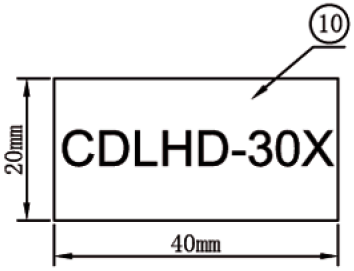

LABLE 1 DRAW

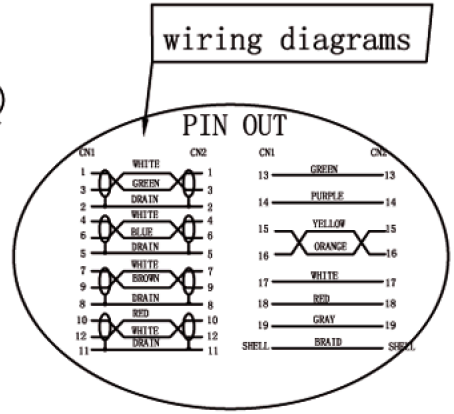

MATERIAL LIST:

NO.	PARTS. NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑩	LABLE 1	SEE PICTURE SHOWS 1	1	
⑨	MINI TIE	Mini Tie. Color For Black	2	
⑧	POLYBAG	COLOR FOR NATURAL SEE NOTE:2	1	
⑦	H.S TUBE	EVA H.S TUBE, Filmy and tybe. Color Black, ⌀0.6mm, L:10mm.	10	
⑥	H.S TUBE	EVA H.S TUBE, Filmy and tybe. Color Black, ⌀2.0mm, L:6mm.	8	
⑤	H.S TUBE	EVA H.S TUBE, Filmy and tybe. Color Black, ⌀1.5mm, L:4mm.	8	
④	DOS SHELL	HDMI assembled steel, U-shaped nickel	2	
③	MOLD HOOD	Shore A 80PVC(UL94-2)color For BLACK	2	
②	CABLE	HDMI 30AWG(7/0.102BC*1P+E+WAM)*4+7/0.102TC*1P+7/0.102TC*5C+AEB B=0.12mm/5*16 AL-MG JACKET COLOR:PVC/BLACK(BK20)OD:6.0mm	1	
①	HDMI CONNCTOR	19P/M comector Crinping Type, The Pin Gold Plating, the shell for Gold Plating	2	

DRAWING		PART MAME	HDMI 19P/M-HDMI 19P/M BLACK		
CUSTOMER		ICON	TOLERANCE		
CUSTOMER'S ITEM	CDLHD-30X		X. ±1.00 X.X ±0.50		
APPRO BY	CHECK BY	DRAWN BY	SCALE	MM	
			PAGE	1/1	